


# LineFinder-2200| Multi-Frequency Receiver

## The do it all receiver kit

Sleek, easy to use with automatic depth calculator for accuracy +/- 10%

The LF 2200 comes loaded with 3 built-in industry standard sonde frequencies, 16 Hz (steel or ductile iron), 512 Hz (cast iron or non-metallic) and 8 KHz (nonmetallic only) sondes. Customize any sonde or line trace frequencies from 16 Hz to 100+KHz. And with the capability to trace underground metallic lines at 4 built-in industry standard frequencies using our BuzzBox external line exciter you will be ready to locate almost anything.

The Storm watertight and impact-resistant case is the perfect accessory to help protect your LineFinder from the elements.

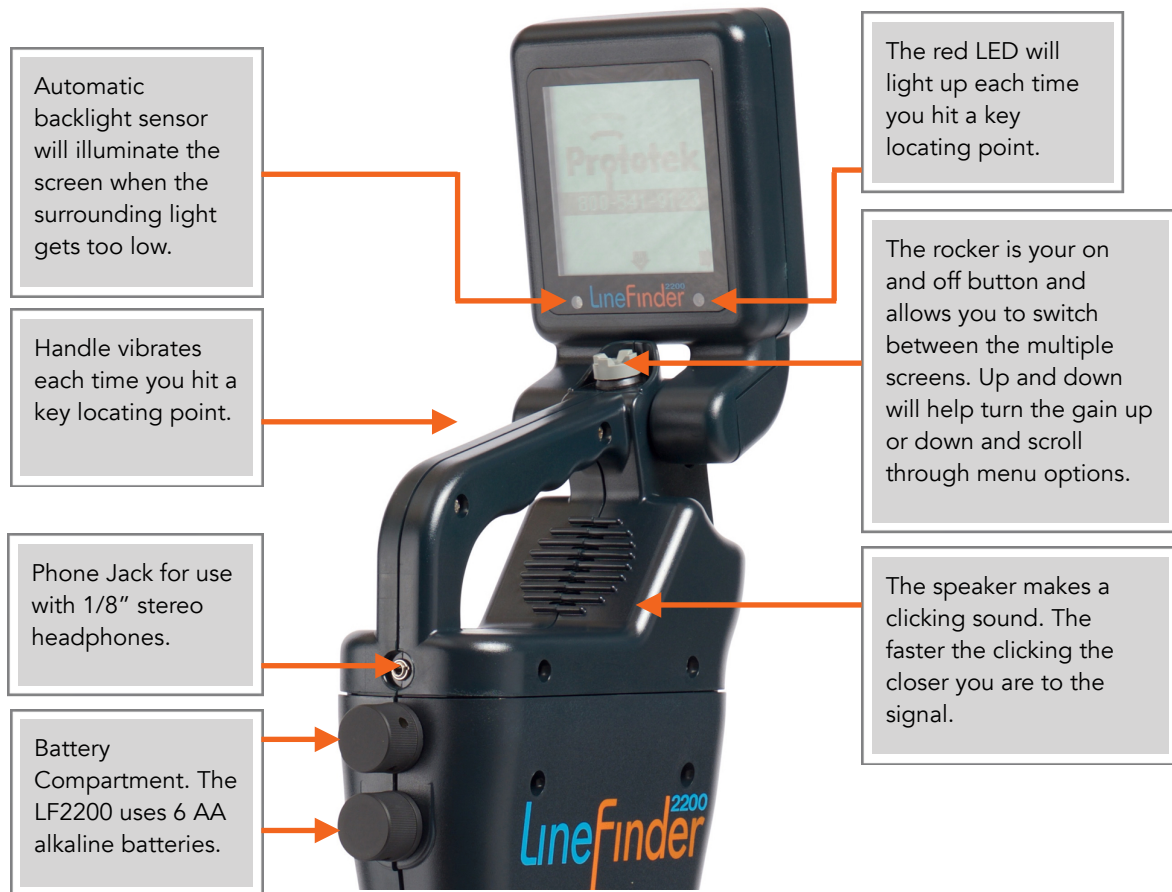

**Kit:** 1 LF 2200 receiver and 1 Pelican hard case

**Weight:** Receiver – 6 lbs.

Case – 17 lbs.

Receiver with case – 23 lbs. (carrying case sold separately)

**Dimensions:** Receiver – 32" L x 8" W x 4-1/4" H

Case – 40" L x 16-1/2" W x 6-3/4" H

**Power source:** 6 AA Alkaline batteries

**Depth Measurements:** English and Metric

**Standard Frequencies:**

**Sonde:** 512 Hz, 16 Hz, 8 KHz

**Line Trace:** 8 KHz, 16 KHz, 32 KHz, 64 KHz

**Passive AC Line Trace:** 50-60 Hz

**Customize:** Any frequency from 16 Hz-100 KHz on sonde or line trace mode

